



WIRING DIAGRAM (Anschlussdiagramm)


Standard
2 + 2 Ohm

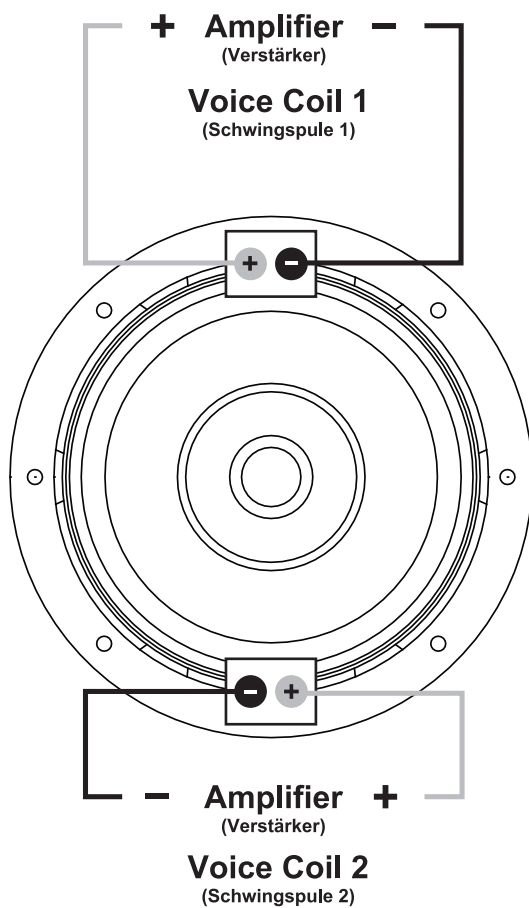

Parallel
1 Ohm

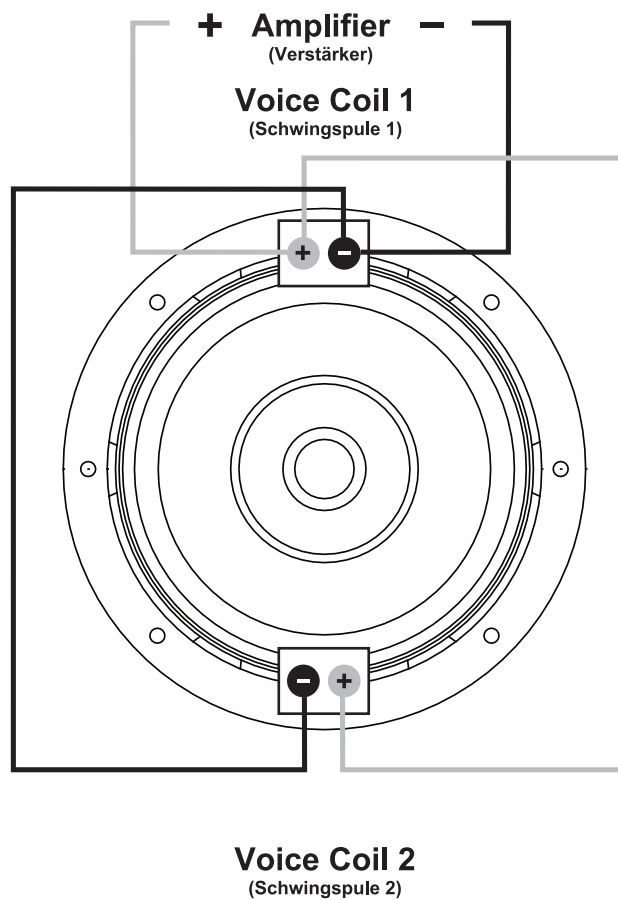

Serial
(Reihe)
4 Ohm

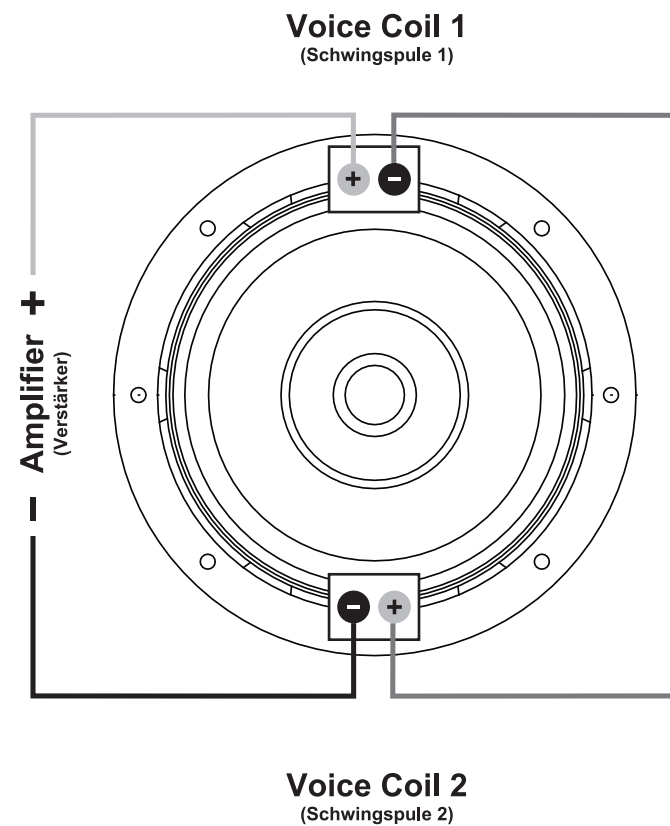

SPECIFICATIONS

(Technische Daten)

	RMS W	MAX W	NOM. IMP. Ohm	OUTER DIAMETER Außendurchmesser mm	MOUNTING HOLE Einbauöffnung mm	MOUNTING DEPTH Einbautiefe mm	Xmax +/- max. mm	SD cm ²	Mms g	Re Ohm	Fs Hz	Qms	Qes	Qts	VAS L	SPL dB/1W	VC mm
ZXS6D2	200	400	2 + 2	175	150	113	14	143	42,2	2 x 2	50	4,00	0,48	0,43	6,8	84	38
ZXS8D2	300	600	2 + 2	212	180	125	16	202	119,2	2 x 2	31,3	3,25	0,51	0,44	12,4	84	50

RECOMMENDED ENCLOSURE DESIGN

(Empfohlenes Gehäusedesign)

	SEALED ENCLOSURE (Geschlossenes Gehäuse)
	VOLUME Volumen Vb L
ZXS6D2	5 - 15
ZXS8D2	9 - 15

CONDITIONALLY RECOMMENDED ENCLOSURE DESIGN

(Bedingt empfohlenes Gehäusedesign)

	VENTED ENCLOSURE (Bassreflex-Gehäuse)					
	VOLUME Volumen Vb L	-3dB FREQ. F3 Hz	TUNING FREQ. Fb Hz	PORT Kanal Ø cm	PORT SURFACE Kanal Fläche cm ²	PORT LENGTH Kanal Länge cm
ZXS6D2	10	43	49	6	28	29
ZXS8D2	20	32	39	7	38	31



DISPOSAL / RECYCLING

If you have to dispose the loudspeakers, please note that no electronic devices must be disposed in the household waste. Dispose the loudspeakers at a suitable recycling facility in accordance with local waste regulations. If necessary, consult your local authority or dealer. More information at www.audiodesign.de/english/disposal



ENTSORGUNG / RECYCLING

Falls Sie die Lautsprecher entsorgen müssen, beachten Sie, dass keine elektronischen Geräte im Hausmüll entsorgt werden dürfen. Entsorgen Sie die Lautsprecher samt Komponenten in einer geeigneten Recyclinganlage gemäß den örtlichen Abfallbestimmungen. Konsultieren Sie gegebenenfalls Ihre örtliche Behörde oder Ihren Händler. Mehr Informationen unter www.audiodesign.de/entsorgung



DISTRIBUTION:

Audio Design GmbH · Am Breilingsweg 3 · D-76709 Kronau / Germany

Fon +49 7253 - 9465-0 · Fax +49 7253 - 946510 · www.audiodesign.de · www.hifonics.de